




Quick-Adjust Style "R" Finish Feeder

304 Stainless Steel

- One easy adjustment per side with one-bar quick adjust.
- 16 positive-lock feed positions.
- Allows for easy and specific instructions to your confinement personnel for feed flow adjustment.
- Rolled edge agitator for strength.
- Shipped fully assembled.
- Available with or without feed tube holder.
- Constructed entirely of the highest quality 304 stainless steel.
- Available with Sight Guards.
- Available single or double sided.

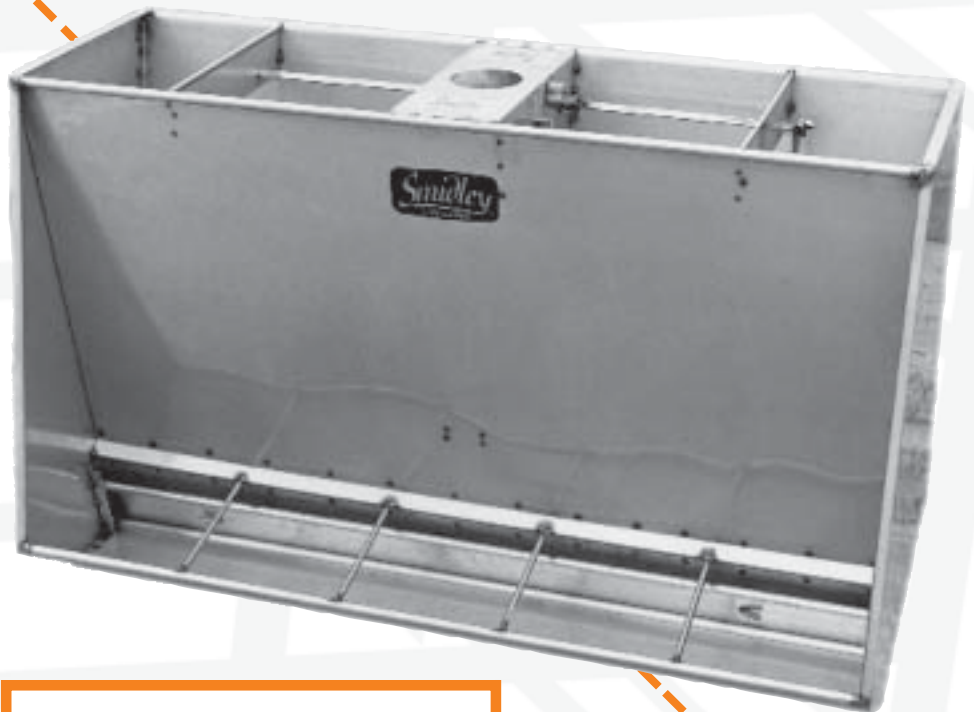

Marting Mfg. of Iowa, Inc.
551 3rd Ave. SE
P.O. Box 67
Britt, IA 50423

(641) 843-4431
641-843-4432 Fax
800-392-5632 Toll Free
www.marting.com

The Feeder that can meet all your needs.

- Feeder is checked, then cleaned and filed eliminating sharp edges

- Constructed of the highest quality 304 stainless steel

Six 14-gauge bin supports two at the top and four in the bin

All edges are tightly rolled for maximum strength and easy cleaning



20 gauge bin stiffener with holes for 3/8" divider rod, making them stronger than other dividers that are butt welded to bin side.

1/2" rod inserted into edge roll for maximum corner strength, reducing breakage.

Originally, I wanted a round feeder but, after purchasing the Style "R" stainless steel feeder from Marting Mfg., I wouldn't have anything else. Trouble free, low maintenance and cleans well. You set them and leave them. Easy access for my early weaned pigs and best of all **No Feed Wastage.**

Wes VanKooten
Leighton, IA

I like the ease, speed and accuracy of the Style "R's" adjustment that along with minimal feed wastage has always made Smidley an outstanding feeder.

Doug Verbrugge
Britt, IA

My previous feeders just couldn't compare to the Smidley Style "R" feeder. Well constructed, accurate adjustment, and **No Feed Wastage.** Four and half years later I am still using the Smidley "R" feeders in my barns without any problems and I highly recommend them.

Joe D. Paul
Perryton, TX

Specifications - Two Sided

MODEL NO.	SIZE	CAPACITY	LENGTH	WEIGHT
14530	#4, 8 feed openings	5.6 bu.	40"	86 lbs.
14474	#5, 10 feed openings	7.0 bu.	50"	100 lbs.
14597	#6, 12 feed openings	8.4 bu.	60"	114 lbs.
14598	#7, 14 feed openings	9.8 bu.	70"	126 lbs.
WIDTH-25 3/4"		HEIGHT - 31 1/2"		

- Heavy 1/2" nut for support and eliminates wear on adjust system
- Heavy 3/8" adjustment arm.
- Feeder is double welded for long life
- Wean to finish divider with extra 3/8" rod for strength and safety



Double welded for long life

16 gauge feed tube holder

One easy adjustment per side with one-bar quick adjust

16 positive-lock feed positions for fine tuned adjusting. 1/16" per move each position numbered, allowing for easy and specific instructions to confinement personnel for feed flow adjustment

3/8" square solid shaft adjustment bar



Specifications - Two Sided

MODEL NO.	SIZE	CAPACITY	LENGTH	WEIGHT
14830	#4, 8 feed openings	6.8 bu.	40"	95 lbs.
14643	#5, 10 feed openings	8.5 bu.	50"	110 lbs.
14832	#6, 12 feed openings	10.2 bu.	60"	124 lbs.
14833	#7, 14 feed openings	11.9 bu.	70"	137 lbs.
WIDTH-25 3/4"		HEIGHT - 37 1/2"		

Smidley Products

More great products
from Marting Mfg.




Finishing Feeder
(Model 34236B)



Easy Crank Top
Adjust Agitator

Nursery Feeder
(Model 16228M)

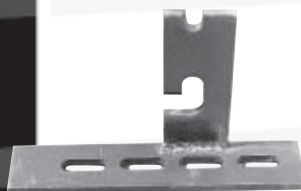

Quick Attach Foot
(for Gating)

Gating



Gate Latch

Marting Mfg. of Iowa, Inc.
551 3rd Ave. SE
P.O. Box 67
Britt, IA 50423

(641) 843-4431
641-843-4432 Fax
800-392-5632 Toll Free
www.marting.com